



INVESTOR IN PEOPLE

The Patent Office  
 Concept House  
 Cardiff Road  
 Newport  
 South Wales  
 NP10 8QQ

6804/1243

REC'D 20 AUG 2004

WIPO


PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

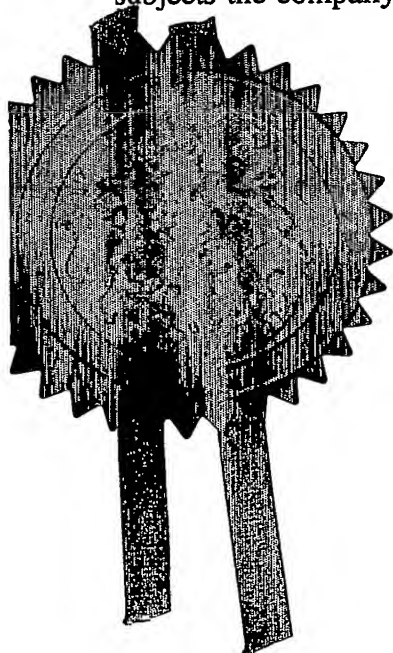

Signed

Dated

12 August 2004

**PRIORITY  
 DOCUMENT**

SUBMITTED OR TRANSMITTED IN  
 COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

The  
Patent  
Office

1/77

Patents Act 1977  
(Rule 16)

**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)



The Patent Office  
Cardiff Road  
Newport  
Gwent NP10 8QQ

1. Your reference

**A30059**

25MAR03 E794751-1 003052  
P0177700 0.00-0306740.2

2. Patent application number  
(The Patent Office will fill in this part)

**0306740.2**

3. Full name, address and postcode of the or of each applicant (*underline all surnames*)

**BRITISH TELECOMMUNICATIONS public limited company  
81 NEWGATE STREET  
LONDON, EC1A 7AJ, England  
Registered in England: 1800000**

Patents ADP number (*if you know it*)

~~1867002~~

**6300388001**

If the applicant is a corporate body, give the country/state of its incorporation

**UNITED KINGDOM**

4. Title of the invention

**ANNOUNCEMENT THREAD ADDRESSING**

5. Name of your agent (*if you have one*)

"Address for Service" in the United Kingdom to which all correspondence should be sent (*including the postcode*)

**BT GROUP LEGAL  
INTELLECTUAL PROPERTY DEPARTMENT  
HOLBORN CENTRE  
120 HOLBORN  
LONDON, EC1N 2TE**

Patents ADP number (*if you know it*)

~~4867001~~

**7980311001**

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (*if you know it*) the or each application number

Country

Priority application number  
(*if you know it*)

Date of filing  
(*day / month / year*)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(*day/month/year*)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (*Answer 'Yes' if:*

**YES**

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

(See note (d))

# Patents Form 1/77


9. Enter the number of sheets for any of the following items you are filing with this form.  
Do not count copies of the same document

Continuation sheets of this form -

Description 22

Claim(s) 5

Abstract 1

Drawing(s) 6 + 6 

10. If you are also filing any of the following, state how many against each item

Priority Documents


Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77) 1

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

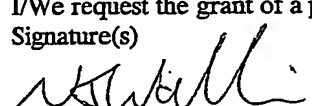11. I/We request the grant of a patent on the basis of this application.  
Signature(s)  Date: 24 March 2003  
**WALLIN, Nicholas James, Authorised Signatory**

12. Name and daytime telephone number of person to contact in the United Kingdom  
**Rod HILLEN** **020 7492 8140**

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

1

Announcement Thread AddressingTechnical Field

The present invention relates to a method and apparatus for allocating an identifier to a sequence of messages, and in particular to such methods and apparatus which are suitable for use in publish-subscribe architectures.

Background to the Present Invention and Prior Art

Publish-Subscribe technologies are known in the art which allow users to monitor for information and the like by listening to known information channels. In our earlier published International patent application no WO01/99348 we describe a publish-subscribe architecture we term the Generic Announcement Protocol ("GAP"), wherein messages relating to a defined subject are transmitted over communications channels which are listened to by listener applications. That is, GAP, and publish-subscribe technologies more generally, allow users to create channels that relate to a 'subject', which we generalise here to a 'sequence of object versions', which we will term a 'thread'. Usually current approaches such as TIBCO TIBnet or Talarian SmartSockets (see <http://www.talarian.com/industry/middleware/whitepaper.pdf>) use hierarchical naming trees to identify channels. The hierarchical naming approach does at least ensure each identifier is unique across all the contexts in which any of the object versions may appear, which is an important requirement. But there is also a problem in that the technology must also manage change of how people name subjects (e.g. company names change). With hierarchical naming, a change at any level in the hierarchy is disastrous for all system lower in the hierarchy, because they are usually widely distributed.

A further problem with current approaches is that the name hierarchy also defines the authority to create new names. With current solutions, each enterprise has created its own top for its own hierarchy. However, the way these naming hierarchies have been designed makes them difficult to extend upwards, rather than downwards, leading to difficulty distributing naming hierarchies effectively across enterprise boundaries. Thus current systems are practically limited to deployment within one enterprise. Although pairs of enterprises can work out ways to share a

hierarchy and manage new subject creation, this is not scalable to many, changing, arbitrary relationships between enterprises. It only works well if each merger was planned from the start. Also current approaches are designed so that new channels are created by system administrators for an enterprise, not just any user within the enterprise. Because many low-level relationships can exist between enterprises, channel creation is not efficient to control from one department in each enterprise, leading to frustration when what should be purely administrative steps are used as an opportunity to exert political/commercial controls. Current approaches also do not cope well where each enterprise has many relationships with other enterprise system, each of which is regularly changing.

However, if hierarchies are not to be used, we then encounter a new problem that if anyone is to be able to create a channel identifier; they must be assured that it is unique, and preferably with no prior configuration or registration requirements. It is towards addressing these problems that the present invention is directed.

#### Summary of the Invention

The present invention overcomes the above described problems by using an announcement thread addressing format which comprises a meaningful part concatenated with a meaningless part. The meaningful part is preferably the address of the party which generates the addressing identifier, whereas the meaningless part may be random data. An allocator method and apparatus is therefore provided which acts to generate such announcement thread identifiers (AThIDs), and to allocate them to channels as appropriate.

In view of the above, from a first aspect there is provided a method of allocating a sequence identifier to a sequence of messages relating to substantially the same subject matter and which are to be transmit onto one or more communications channels, the method comprising:

- generating a meaningless sequence identifier part;
- combining the generated meaningless identifier part with a meaningful sequence identifier part to provide the sequence identifier; and
- allocating the sequence identifier to the sequence of messages;

wherein the meaningless sequence identifier part is generated such that when combined with the meaningful sequence identifier part the resulting sequence identifier is unique at least at that time, and wherein when the messages in the sequence are subsequently transmitted, the identifier is at least partially incorporated therein so as to identify the sequence.

Preferably, the meaningful part of the sequence identifier is a pre-existing network address or other network locator. This allows for the degree of permanence required in the identifier, whilst allowing for a degree of control to be retained with the allocating party.

10 In an embodiment of the invention the meaningful part of the sequence identifier is preferably a Universal Resource Locator (URL). This provides advantages due to the feature of a URL that it can represent both a process (e.g. a HTTP daemon) and persistent data stored on a machine. It can also be used to represent a programme dedicated to AThID allocation, which can be accessed through the  
15 generic process serving all URLs of that scheme, using techniques such as the common gateway interface (CGI).

In an alternative embodiment, the meaningful part of the sequence identifier is preferably an email address. This provides advantages that it is easy for a human operator to remember.

20 In other embodiments of the invention the meaningful part of the sequence identifier may be an Internet Protocol network address. This provides advantages in that most network entities are already allocated with IP addresses, and hence such a scheme would be easy to implement.

Moreover, in embodiments of the invention the meaningless part of the  
25 sequence identifier is preferably a number, and furthermore is preferably randomly generated. The use of numbers allows for convenient generation by a computer or other machine.

In a preferred embodiment, the number used as the meaningless part of the sequence identifier is produced by applying a hash function to data defining the  
30 subject matter of the sequence of messages. This provides a link via the hash function between the actual definition of the subject matter of the sequence of messages and the resulting number, such that if a new sequence identifier is

required for different subject matter (i.e. the subject matter has been newly defined), a new number will be obtained as a result of the hash of the new definition.

In a preferred embodiment, the first aspect may be extended by further comprising checking if the generated meaningless part of the sequence identifier has  
5 been previously generated, and if so generating another meaningless sequence identifier part; wherein the checking and generating steps are repeated until a meaningless sequence identifier part is obtained which has not been previously generated. This ensures that the resulting obtained sequence identifier is unique across the present usage space.

10 Additionally, preferred embodiments of the invention preferably further comprise the step of receiving a request for a sequence identifier, the allocating step then further comprising transmitting the subsequently obtained sequence identifier to the party or element from which the request was received. Such functionality allows for third parties with possibly unstable contexts themselves to request and obtain  
15 sequence identifiers from a possibly more stable identifier allocator.

From a second aspect, the invention also provides an announcement method for use in a publish-subscribe architecture, the method comprising: transmitting a sequence of messages relating to substantially the same subject matter on to one or more communications channels, the method being characterised by including in each  
20 message at least part of a sequence identifier, the sequence identifier having been allocated to the sequence in accordance with the first aspect as described above.

Additionally, from a third aspect there is also provided an announcement method for use in a publish-subscribe architecture, the method comprising transmitting an index message onto an index channel, the index message containing  
25 one or more sequence identifiers respectively identifying one or more sequences of messages, each message in each sequence relating to substantially the same subject matter, the method being characterised in that the sequence identifiers are respectively allocated to the sequences of messages in accordance with the first aspect as previously described.

30 From a fourth aspect there is also provided an apparatus for allocating a sequence identifier to a sequence of messages relating to substantially the same subject matter and which are to be transmit onto one or more communications channels, the apparatus comprising:

identifier part generation means for generating a meaningless sequence identifier part;

sequence identifier generation means arranged to combine the generated meaningless identifier part with a meaningful sequence identifier part to provide the  
5 sequence identifier; and

sequence identifier allocating means for allocating the sequence identifier to the sequence of messages;

wherein the meaningless sequence identifier part is generated such that when combined with the meaningful sequence identifier part the resulting sequence  
10 identifier is unique at least at that time, and wherein when the messages in the sequence are subsequently transmit, the identifier is at least partially incorporated therein so as to identify the sequence.

Within the fourth aspect the corresponding advantages and further features may be obtained as already described above in respect of the first aspect.

15 The present invention may also provide a fifth aspect corresponding to an announcement system for use in a publish-subscribe architecture, the system comprising: message transmission means for transmitting a sequence of messages relating to substantially the same subject matter on to one or more communications channels, the system being characterised by the message transmission means  
20 operating to include in each message at least part of a sequence identifier, the sequence identifier having been allocated to the sequence by an apparatus according to the fourth aspect as described.

Additionally, the present invention from a sixth aspect also provides an announcement system for use in a publish-subscribe architecture, the system  
25 comprising: message transmission means for transmitting an index message onto an index channel, the index message containing one or more sequence identifiers respectively identifying one or more sequences of messages, each message in each sequence relating to substantially the same subject matter, the system being characterised in that the sequence identifiers are respectively allocated to the  
30 sequences of messages by an apparatus according to the fourth aspect as set out above.

From a seventh aspect, the present invention further provides a computer program or suite of programs so arranged such that when executed by a computer



system it/they cause/s the system to perform the method of any of the above described first to third aspects. The computer program or programs may be embodied by a modulated carrier signal incorporating data corresponding to the computer program or at least one of the suite of programs, for example a signal  
5 being carried over a network such as the Internet.

Additionally, from a yet further aspect the invention also provides a computer readable storage medium storing a computer program or at least one of suite of computer programs according to the seventh aspect. The computer readable storage medium may be any magnetic, optical, magneto-optical, solid-state, or other  
10 storage medium capable of being read by a computer.

#### Brief Description of the Drawings

Further features and advantages will become apparent from the following description of an embodiment of the invention, presented by way of example only,  
15 and by reference to the accompanying drawings, wherein:

Figure 1 is a system block diagram of the general system architecture in which the invention is intended for use;

Figure 2 illustrates an announcement message format used by the announcement system in which the invention is used;

20 Figure 3 is a message sequence diagram illustrating the sequence of messages that are transmitted in an embodiment of the invention;

Figure 4 is a flow diagram illustrating the steps performed by an allocator in the embodiment of the invention;

Figure 5 illustrates a relative sequence identifier provided by an embodiment  
25 of the invention;

Figure 6 illustrates the binary format of a sequence identifier provided by the embodiment of the invention; and

Figure 7 illustrates how several sequence identifiers may be combined into a single index announcement message in an embodiment of the invention.

30

#### Description of the Embodiments

An embodiment of the invention will now be described with respect to Figures 1 to 7.

Figure 1 illustrates a publish-subscribe architecture which constitutes the operating environment of the present invention. This will be described next, and the terminology to be used herein defined thereby.

In Figure 1 an announcing application 10 is provided running on a computer system or the like (not shown). The announcing application operates to generate or otherwise process information which is to be announced by transmission of a message (an announcement) relating to a predefined subject onto a communications channel 18. The scope of the operation of the announcing application 10 as used herein is deliberately broad, as the announcing application could be any application which produces information relating to any characteristic of any sort of entity. As examples, an announcing application 10 could be installed on a temperature sensor, and which acts to periodically announce the temperature sensed by the sensor. In another example, the announcing application could be located as part of the system of a stock exchange, and act to announce the share price of a particular share, or the index level of a stock index. In another application, the announcing application could be used in a distributed programming environment to track the value that an internal variable to a program takes, and to produce information relating to the value of that variable.

The announcing application 10 communicates with an announcer 12. The announcer 12 is a software programme forming part of a communication middleware that is given information by other locally running programmes (i.e. the announcing application 10) to announce information globally but efficiently to any interested parties by virtue of the transmission of messages onto the communications channel 18. 'Locally' here usually means on the same computing device, but an announcer 12 may be arranged on one device to act for a number of locally connected devices.

Additionally provided as part of the publish-subscribe architecture is a listener 16. The listener 16 is another software programme which forms part of the communication middleware. It receives the messages sent by the announcer 12 on the appropriate communications channels 18. The listener 16 acts to communicate with a listener application 14, which is the application which makes use of the information provided by the announcing application 10. Thus, continuing the examples given above, the listening application 14 could be an industrial control application which acts to control an industrial process in response to the temperature

sensed by the temperature sensor, and communicated to the listener 16 in a message from the announcer 12.

It should be noted here that the announcer 12 and listener 16 are completely decoupled, which means that the announcer 12 does not need to have any  
5 information about the identity, the credentials and the number of listeners.

When the announcing application 10 continually updates and produces new information relating to the data, object or entity to which it relates at each update a new announcement message is created and transmitted by the announcer 12. We define such a sequence of related announcement messages to be an "announcement  
10 thread", with each individual message in the sequence being an "announcement version". A new version of an announcement (an announcement version) is assumed to contain information related to previous versions in some way specific to the application making the announcements.

An announcement message is therefore a new announcement version of an  
15 announcement thread, and could occur at any unknown time in the future. The new announcement version expresses an update of specific information relating to the data, objects, or entities which the announcing application is monitoring.

Within such an architecture there is a clear need to be able to identify announcement threads, being the sequence of messages transmit onto the  
20 communications channel 18. This is so listeners can receive an announcement message and know to which thread the announcement message relates and thereby determine the subject matter of the message. Usually, the subject matter of an announcement thread will have been defined in advance.

Therefore, in order to allow such identification, each announcement thread is  
25 provided with an announcement thread identifier (ATHID), which is the globally unique identifier for an ANNOUNCEMENT THREAD. Within an announcement message, both the announcement thread identifier 201 and the announcement version 202 (usually a numeric value) are included, as shown in Figure 2.

In order to provide for globally unique ATHIDs, an allocator 20 is provided.  
30 An allocator 20 is an entity that creates ATHIDs for every new announcement thread at the request of an announcer 20. The allocator 20 is therefore arranged to communicate with the announcer 12, usually over the communications channel 18.

The allocator 20 is preferably a software application running on a host computer system, but could in some embodiments be a human.

Note here that the allocator 20 and the announcer 12 are completely decoupled. An allocator 20 and an announcer 12 communicate together only for the  
5 creation of a new AThID.

For use within such an architecture, an AThID must have certain properties. Firstly, an AThID should be globally unique across all the spaces where it may eventually become relevant. This is because the identifier may become relevant to a context that did not exist when the identifier was created. Allowing listener mobility  
10 is enough to require global uniqueness.

Secondly, preferably such AThID's should not be subject to a hierarchical registration scheme. An obvious solution to the problem of AThID allocation would be to create unique identifiers by registering them with a hierarchical registration system with a single global root. However, open systems that allow people and  
15 programmes to create new objects autonomously are preferable over those requiring registration. Even where registration is delegated hierarchically, creation of the hierarchy becomes an obstacle to immediate use of the system. Also, a registration hierarchy is often perverted into a permission hierarchy by those that control it. For these reasons we do not favour such registration schemes.

20 A third factor to be considered is the stability of the AThID. If we reject uniqueness by registration, an alternative is to allocate identifiers that are only unique to a pre-existing unique identifier of the allocator, then concatenate the two. However, by doing this, we are making the identifier relative to one of its parent contexts. But, because every set of objects exists in multiple contexts, we then have  
25 to guess which parent context is going to outlive all the others. Therefore, we have to carefully choose which pre-existing unique identifier to use, to ensure it will rarely be in a context that may die before its children.

Additionally, an AThID must be designed in a simple manner so that they can be used efficiently with application such as HTTP, SNMP, LDAP that use an  
30 ASCII representation so an ASCII scheme is required.

In order to meet the above requirements, in the present invention we propose a preferable ASCII representation for an absolute AThID, and which consists

of three mandatory parts concatenated together with the identifiers and separators as shown below:

5 "ath:" <Scheme id> "=" <Allocator id> "\$" <Announcement thread number>

We also present a corresponding binary representation, but this will be described later.

Within the ASCII representation the prefix "ath:" indicates that the string is an AThID, and the following string gives the scheme ID. The scheme ID indicates to the listener which receives a message containing such an AThID what the format of the rest of the AThID will be, and in particular what format the Allocator ID field (AllID) will take. We present a number of possible schemes below, and recommend one of them. However, for future proofing, we still include the ability for new allocation schemes to be introduced by including the scheme identifier in every full AThID.

Following the Scheme ID field is an "=" sign, after which the Allocator ID is included. This is an identifier or address code which uniquely identifies the allocator which generated the AThID. This is the meaningful part of the AThID, as it indicates to a recipient who the allocator was which generated the AThID. The format of the AllID will depend on the scheme, which as mentioned will be described.

Following the AllID is a "\$" symbol, after which there is included an announcement thread number field. The announcement thread number (ATh#) may be any integer in the range 1-65535. ATh# = 0 is reserved (for reasons only relevant when we introduce the binary representation). We do not allow textual ATh#s to avoid the emotional or commercial attachments people would otherwise carry for certain names.

For efficiency of other parts of the system, particularly binary index representations (see later), allocation of ATh#s must not bias towards any specific value. Therefore, allocation of announcement thread numbers is preferably random within the available number space, and hence the actual number chosen carries no meaning. Moreover, it will be appreciated that in other embodiments numbers may be replaced with letters, or with alphanumeric sequences.

In the preferred embodiment lower case insensitive text strings are used to represent each scheme ID in the ASCII representation of an AThID (see the column headed SchTx in Table 1 below). The binary scheme identifier may be any of 0-15 but we only use one code point (1) from the 16 in this space for our recommended scheme, as will be described. We would expect new scheme identifiers (both their binary and ASCII representation) to be registered by the Internet Assigned Names Authority (IANA). Similarly, the new "ath:" URI scheme will need to be registered with IANA.

Some candidate schemes for allocator IDs are given in Table 1. All but a couple of the candidate allocator identifier schemes use pre-existing identifiers that are already unique.

SchID	SchTx	Binary	Description	Notes
		width/b		
-	IPv4	32	IPv4 addr of allocator	
-	IPv6	128	IPv6 addr of allocator	
-	MAIL	var	E-mail address of owner of allocator	
1	URL	var	URL of allocator	
-	IANA	?	IANA assigned allocator id (hierarchical)	
-	GAP	?	Allocator id claimed on well-known GAP channel	

Table 1: Candidate allocator identifier schemes

A first possible scheme is the use of an IP ADDRESS SCHEME. This scheme uses an IP address as an allocator ID and is very easy to set up. However to be effective it requires that the (possibly many) operators of that machine remember which AThIDs have been allocated under that allocator id. Otherwise it is possible that a new operator might not be told that the machine had a set of AThIDs associated with this IP address. That means that different operators could use a similar AThID for different purposes.

An alternative scheme is the MAIL SCHEME. This scheme uses an individual's email address as an allocator ID. However an email address is not a very stable allocator and it could be changed and taken from an allocator without the

allocator's control. This suggests using a neutral address like ATHIDmaster@macdonalds.farm.com, but still leaves the problem of name changes.

A third possible scheme is a URL SCHEME. This scheme uses a uniform resource locator (URL) as an ATHID allocator id. The neat feature of a URL is that it  
5 can represent both a process (e.g. a HTTP daemon) *and* persistent data stored on a machine. It can also be used to represent a program dedicated to ATHID allocation, which can be accessed through the generic process serving all URLs of that scheme. Therefore, an allocator identifier can be chosen with a likely persistence that should  
10 outlive all the ATHIDs it will allocate. A human allocator (if used) is not limited to choosing an allocator identifier under her control and therefore in a transient context. For instance highly persistent organisations can set up a simple ATHID allocator programme accessible through their CGI.

Therefore, we recommend the URL scheme because a URL can be as stable or as volatile as required, and no-one is restricted to only use URLs within their own  
15 contexts, because URLs can be made available to anyone from anywhere on the Internet. An example ATHID using our recommended URL scheme for the allocator identifier would look as follows:

```
<ath:URL=http://www.hosting.org/ATHID?set=farm$31425>
```

20 Note that an ATHID *contains* a URL when using the URL scheme for the allocator id, but it is not strictly a URL itself - it is a uniform resource *identifier* (URI), meeting all the definitions and requirements of a URI. An ATHID URI doesn't locate information. Rather, an ATHID is used indirectly to reference configuration information that locates object versions in both space and time, even though  
25 announcement timing is unknown in advance. On this basis, one might argue that most resource locators do not directly locate their resource either, nor do they contain sufficient information to locate it indirectly either. For instance, an HTTP URL does not usually locate information directly; if it contains a hostname it relies on configuration information in a DNS. An HTTP URL doesn't even contain the IP  
30 address of any DNS resolver even though it depends on one. However, we can still say that an HTTP URL is a locator, because it only relies on static configuration information that is not unique to the resource being located. An ATHID, on the other hand, is not a locator, because it relies on further configuration information specific

to the resource in question. Thus, an AThID is an identifier, only locating a resource when used as the key into to a local database of configuration information collected earlier. Nevertheless, we have chosen to ensure that the *syntax* we define for an AThID meets all the requirements for a URL, because the motivation for most of these requirements is unchanged whether dealing with identifiers or locators.

Where a number of AThIDs appear within one context (e.g. a list), to avoid repetition of similar material, we can define a RELATIVE AThID. For instance, if the context had already defined the base URI as `<ath:URL=http://www.hosting.org/AThID?set=farm>` then the relative URI `<$31425>` would suffice to specify the above absolute AThID. Even if the base URI had a different ATh# appended, the new relative URI would supersede it, as specified in the rules on parsing relative URLs in RFC1808 (as updated by RFC2368 and RFC2396) (assuming again that the motivations for relative URL rules are unchanged for URIs). Note that an AThID without an ATh# appended is invalid.

Within our ASCII representation "ath:" is the URI's scheme name, and is also optional for a relative AThID. But if the allocator identifier is present, it must be preceded by its own *allocation* scheme identifier (e.g. "URL="). The allocator identifier deliberately does not start with a "://" signifying that there is no network location and we are not using generic resource locator syntax, preventing further processing as a relative URL. However, the URL used for the allocator identifier may itself be relative to a base URL, if and only if the context of the relative URL of the allocator identifier is clearly distinguishable from the context of the whole AThID URI.

When the optional "ath:" prefix isn't present, the resulting relative AThID bears a passing similarity to the URL of a non-AThID scheme. However, a valid URL would start with "URL:" not "URL=". Because of this potential ambiguity, this relative form must only be used in contexts where only an AThID would be expected by human users.

Having described the ASCII representation of our preferred AThID format, we now describe a binary representation.

The proposed binary representation of an absolute announcement thread identifier (AThID) is similar but not the same as the ASCII representation. One difference is that the context in which binary representations will be used make any



prefix like "ath:" redundant. A binary ATHID consists of three parts concatenated together (we use `|` to represent concatenation):

<Scheme id> | <Allocator id> | <Announcement thread number>

Here, the ANNOUNCEMENT THREAD NUMBER (ATH#) is a 16 bit integer. ATH# = 0 is reserved. Additionally, the SCHEME ID is a 4 bit integer, with only one code-point defined, SCHID = 1 meaning the URL scheme already recommended above, as shown in the 'SchID' column of Table 1.

The form of the allocator identifier depends on which scheme identifier is used. Clearly, if the IPv4 or IPv6 schemes were used, the allocator identifier would simply be the 32 or 128 bit IP address respectively. For the URL scheme, the allocator identifier is just the string of octets that are identical to the ASCII allocator id.

Relative binary ATHIDs as described above would be expected to be extremely common. They must only consist of the ATH# alone, resulting in a simple binary representation as shown in Figure 5. Here it will be seen that only the 16-bit Ath# is given.

The above definitions of the ATHID parts do not give any clue as to the bit width of an absolute binary ATHID, unless the scheme identifier implies a fixed width allocator id (such as in the case of the IPv4 or IPv6 allocator ID schemes). Therefore, we recommend using the representation convention shown in Figure 6 for binary ATHIDs in protocols, and in particular in binary announcement messages.

Within Figure 6 the leading 16 bits of zeroes allows an absolute ATHID to be distinguished from a relative one (recall that zero is a reserved value for the ATH#). The 12 bit AllID length field gives the length of the AllID field in 32 bit chunks, making the maximum allowable allocator ID 16,384B (for efficiency, it would be wise to keep the length as short as possible. Also, although there is no specified limit to URL length, in practice most URL handling software has a limit. Very early versions of some Mosaic-derived browsers had a 256 character URL limit, while Microsoft Internet Explorer (v5.5 at least) has a limit of 2,083 characters. Server software may also be limited, although Apache can handle up to about 8kB URLs). For AllIDs that do not require a whole multiple of 4 octets, the remnant is padded with zeros. All ASCII allocator identifier schemes should not allow the null character.

The AllID length field is redundant if SchID implies a fixed width allocator id, but it saves knowledge of new scheme ids having to be embedded in protocol parsers.

The binary AThID convention set out above inescapably means that the width of a binary AThID is unpredictable without reading the first word, parsing it, then reading the second word if necessary, then parsing that too. However, given that this is an application layer protocol, we are concerned about performance issues, because index announcements are processed very repetitively but we need not be concerned beyond a certain point.

We now give an example of the use of this binary representation in an index announcement message, with reference to Figure 7 which shows the binary layout of the payload of such a message. An index announcement message is simply a table of AThIDs against their respective version numbers, which are 16 bit integers. Index announcement messages as used in the context of the GAP publish-subscribe system are described in our earlier International patent application WO01/99348, as referenced earlier, the contents of which necessary for understanding the format and use of index announcement messages being incorporated herein by reference.

Within an index announcement message each AThID may well have a different allocator ID, but relative AThIDs may be used nearly all the time, because each listener of the index has been previously told that the absolute AThID they are interested in will be in a specific index announcement on a specific channel. Therefore, as long as it is unique within the index, each ATh# will imply the absolute AThID that ends with that ATh#. Therefore, all the index announcer has to do is include the absolute AThID for any pairs of AThIDs that happen to have identical ATh#s. Thus the payload of an index announcement might look as shown in Figure 7.

Here, Ath#\_4 would appear twice, so the announcer qualifies both occurrences of it with the full, absolute AThID specification. For all the other AThIDs (1-3,5,6) the short, relative AThID is sufficient.

If it became necessary to continually repeat an allocator ID because of a clash, it would be possible to define an abbreviated symbol for it, as is done in XML namespaces. In a way, this is similar to the internal symbols used when compressing data.

Having described the ATHID format provided by the present invention, we now describe the operation of an allocator program which is able to perform the task of the allocator 20 in the architecture described above.

A managed allocator programme could be very rudimentary. It would only need parameters that allowed a user (i.e. an Announcer 12) to perform the following functions:

- i) Register new ATHIDs (respecting the above requirement that the choice of ATH#s is not biased to certain parts of the number space);
- ii) Unregister an existing ATHID (see later); and
- iii) There may also need to be methods to create and destroy sets of ATHIDs (e.g. the set 'farm' in the example above).

An allocator programme might optionally support association of textual strings with ATHIDs as they are created, in order to provide human-readable descriptions of announcement threads. We will discuss the association of a textual string to an ATHID (XML file) in the example operation given below.

Returning to Figure 1, imagine that the announcing application 10 requires a new ATHID. In such a case a request for a new ATHID will be made from software associated with the announcing application, to the allocator 20.

In order to do this, within the described embodiment the announcing application generates a human readable description of the information to be announced. This is a description of the subject matter of the announcement thread to which the desired ATHID will be applied. The description could be a simple .txt file or a .doc file etc. However our suggestion is to use the eXtensible Markup Language (XML). We use XML because it offers a unique combination of flexibility and simplicity by both humans and machines.

An example human-readable description of the information XML file is given below:

```
<?xml version="1.0" standalone="yes"?>
<HEADER><HEADLINE>GAP Announcement</HEADLINE></HEADER>
<FROM>alice@company.com</FROM>
<DATE>2/2/2003</DATE>
<ITEM>
```

<DESCRIPTION> Standard version for 3G protocol release 3.0  
</DESCRIPTION>

<VALUE> 123986 </VALUE>

</ITEM>

5       The description of the announcement thread is contained in the sections marked <DESCRIPTION> </DESCRIPTION>, whereas the section marked <VALUE> represents a random number that is used to generate different ATh#. If two announcement threads with different descriptions were to be given the same Ath#, then the random value is changed by the allocator 20 in order to  
10 maintain the uniqueness of the ATh#. The announcing application 10 generates a random number simply for data handling process reasons.

      The request from the announcing application 10 to the allocator 20 consists of an HTTP request/reply as illustrated in Figure 3. The announcing application 10 sends a POST request containing: the URL of the ALLOCATOR, the protocol version  
15 and a MIME-like message containing the description of the information to be announced. The server running the allocator program then subsequently responds with a status line, including the message's protocol version and a success or error code, followed by a MIME-like message containing the information of the AThID that has been allocated.

20       In more detail, the HTTP communication is initiated by a user agent associated with the announcing application 10 and consists of a request to be applied to a resource on some server. The HTTP communication usually takes place over TCP/IP connections. The default port is TCP 80, but other ports can be used. This does not preclude HTTP from being implemented on top of any other protocol  
25 on the Internet, or on other networks. HTTP only presumes a reliable transport; any protocol that provides such guarantees can be used. In this design we use HTTP v1.1 but other version could be used.

      The POST HTTP method is used to request that the allocator program accepts the entity enclosed in the request as a new subordinate of the request URL  
30 in the request line. POST is a HTTP method designed to provide a block of data to a data handling process. If the entity enclosed is passed correctly to the data handling process in the allocator an OK answer is sent back including an entity that describes the AThID.

Upon receipt of the POST request, the allocator 20 then performs the following steps (more precisely, the host computer hosting the allocator program performs the following steps under the control of the program).

Having received the request at step 4.2, the next step (s.4.4) is that, if required, the allocator ID is generated. Usually this step would not be carried out, for the reason that the allocator ID is preferably a pre-defined URL (or email address or IP address, as we describe above). However, in some embodiments both a new allocator ID and an ATh# may be combined to form an AThID, and hence this step is provided as an optional step.

10 Following step 4.4, at step 4.6 the received XML script which provides the human- and machine-readable description of the subject matter of the announcement thread is stored in a local store 22 provided at the allocator 20. This is so that a record is kept at the allocator of the announcement threads for which an AThID has been issued.

15 Next, at step 4.8, The allocator program then hashes the description contained in the XML file and the random number contained in the value field to give the Announcement Thread Number. That is, the ATh# is given as follows:

ATh# = md5(XML <DESCRIPTION>, XML <VALUE>)

As we mentioned above, an ATh# preferably consists of 16 bit, although the preferred hash function is MD5, which gives a 128-bit output. The output of the hash function is therefore truncated to the first 16 bits to obtain the ATh#.

Following the generation of the ATh#, a check is performed next at step 4.9 to check that the generated ATh# is unique in the context of the particular allocator (note that it does not have to be globally unique across all available allocators, but only unique in the context of the allocator ID with which it will be combined). This check is performed by matching the generated ATh# with previously generated ATh#s, which are stored in the local store 22. If it is determined that in fact the generated ATh# is not unique i.e. the allocator has produced that ATh# before and has combined the ATh# with the same allocator ID which is to be used in the present case, then a different ATh# must be obtained. This is produced by generating a further random number value which is then substituted into the <value> field of the XML script, and the hash function is applied to this modified data to give a further hash value, which is once again truncated to 16-bits. This

further ATh# value is then compared to see if it is unique within the given context. This process is repeated until a unique ATh# is obtained.

Having obtained a unique ATh#, next at step 4.10 the whole AThID is generated by concatenating the obtained ATh# with the allocator ID used by the allocator. As we explained previously, the allocator ID is preferably a URL. The concatenation is performed according to the AThID format described previously, and hence an AThID of the form:

```
"ath:" <Scheme id> "=" <Allocator id> "$" <Announcement
thread number>
```

10 as an ASCII representation, or of the form:

```
<Scheme id> | <Allocator id> | <Announcement thread number>
```

for a binary representation is obtained.

Having generated the full AThID, at step 4.12 the allocator 20 acts to store the generated AThID in the local store 22. The AThID is stored referenced to the XML description of the announcement thread for which it is generated. As discussed above, the purpose of storing the AThID is to allow a comparison of newly generated AThIDs with previously generated AThIDs.

Finally, at step 4.14 the allocator 20 transmits the generated AThID back to the requesting announcer as part of the OK response to the POST request. The announcer 12 can then use the AThID in any announcement messages belonging to the announcement thread.

We now describe further embodiments which introduce additional functionality to the embodiments described above.

The embodiment described above does not include security requirements. Therefore, in another embodiment the session is initiated using HTTP protocol and the known Security Socket Layer. In such a case the allocator 20 obtains knowledge of the announcer that has requested a new AThID. Exploiting this option the allocator stores the XML file associated with the certificate of the announcing application. This option gives the possibility to the allocator to restrict the allocation of AThIDs to specific announcers.

A further embodiment makes provision for the prevention of Denial of Service (DoS) attacks. A simple DoS attack could prevent the above described embodiments from working properly. A malicious announcer could flood an allocator

with different ATHID requests. The allocator would in the normal course of operation as described above allocate as many ATHIDs as the number of requests. In this scenario the number of useless ATHID allocated would be very high reducing the space and the resource for real ATHID.

- 5 In order to mitigate this attack scenario, in a further embodiment we require that the allocator 20 after sending the HTTP OK does not store the ATHID but instead requests an acknowledgement from the announcer containing the previous and the current random number. If the requested acknowledgement is not received the allocator times out the request. With such a simple method we require the  
10 announcer to maintain some computing resource for each ATHID request sent, and hence it will not be possible for the announcer to flood the allocator with ATHID requests.

In a further embodiment, an announcer could have the ability to allocate a large number of ATHIDs to a specific announcing application: in this case the ATHIDs  
15 could all be regrouped under a specific context (for example a directory in a URL). For commercial reasons it may be important that the user does not specify the specific context, it is the allocator that provides this function. For example an allocated ATHID could look like:

<ath:URL=http://www.hosting.org/ATHID?set=farm\$31425>

- 20 In this example the allocator has allocated a specific set of ATH# called "farm" for a specific announcing application.

A more complicated embodiment could provide the feature of creating a set of ATHIDs without receiving requests from the announcer. In this case we require the allocator to ask for feedback from the listener population and to aggregate  
25 together in a specific set ATHIDs that have similar interests. This option could be very useful since it allows the creation of logical structures of different ATHIDs based on user experience: in this case based on user feedback. The only information required from the announcer is the XML file that can be used together with user feedback.

- 30 Such a scheme could be very useful to allow searching of similar ATHIDs without the need to go to the announcing application (for example in a search engine).

We turn now to the issue of how to deregister an existing ATHID. The process of deregistration is difficult to define. The problem is that an ATHID can be used by different applications. Different applications could use the same ATHID to exchange particular software updates in different and separate contexts. A single user cannot decide to deregister or delete a specific ATHID since it could be used by another application that the user cannot control. However there are requirements to deregister an ATHID because it could become obsolete after a certain amount of time.

In order to get around the above problem we propose two methods that allow users to deregister an existing ATHID:

i) TIME TO LIVE (TTL). In one embodiment the ATHID is associated with a particular time-to-live that is stored on the allocator. This time-to-live information represents a time stamp (date) after which the ATHID will be discarded. To avoid an ATHID being discarded the allocator needs to receive a refresh message. This refresh message can be transmit by any announcing applications that are using the specific ATHID. As soon as the TTL is renewed the allocator can announce such to other announcing applications. If the TTL is not refreshed before the deadline the ATHID is silently discarded by the allocator.

ii) Announcing application owns the ATHID. In this embodiment only a specific announcing application can use and manage a particular ATHID. The announcing application can decide when to delete an announcement. The effect of an ATHID discarded does not influence other applications because it is only announced by a specific application.

The implementation of this scheme requires a POST HTTP message containing the parameter of the ATHID to be deleted. It is important that the option to delete an ATHID is only allowed when a security scheme in place.

In conclusion, therefore, the addressing scheme we describe is particular efficient in a scenario such as GAP, where an Ath# has to maintain is uniqueness properties within a well-specified Multicast channel, and the full ATHID is only used when a collision is present on the channel. Notice here that an address (if needed) can be referred to a particular user/machine but this is not in the requirement.

With regards to the application of the invention to other messaging schemes, large scale messaging scheme usually require that the information is



accessible everywhere in the network in an efficient and unique way. The addressing scheme we have described uses a process that allows a stable and unique identifier to be used by different messaging solutions in a seamless manner. The same ATHID can be used to address the same information on different platforms and provided by  
5 different users.

Our addressing scheme provides two main advantages:

- i) The ability for anyone to allocate an ATHID using anyone else's allocator, allowing an allocator of suitable stability to be chosen for each thread in question, rather than having to use one in one's own (possibly insufficiently stable) context;  
10 and
- ii) The ability to generate announcement addresses comprising a generator ID and a preferably random announcement ID, and allowing these two parts to be exploited differently depending on the specific context.

We conclude with an example of a possible commercial use of our  
15 addressing scheme.

Here, an organization that is renowned in terms of stability allocates a stable allocator ID to be used for ATHIDs. For example, we may imagine a general identifier for software updates for the 3G protocol being provided by a stable organisation such as the IEEE, which allocates a unique identifier for this subject. Thanks to the  
20 generated Announcement Thread Number being combined with the allocator ID the resulting ATHID is random enough to avoid ownership disputes in the future (characteristic of the classic URL scheme). It is important to notice that the resources of the stable allocator are separated from any other resources when the ATHID is used, such that organisations like the IEEE are not discouraged from  
25 offering such a service. The service consumes a microscopic resource and never requires them to arbitrate over ownership of names.

Unless the context clearly requires otherwise, throughout the description and the claims, the words "comprise", "comprising" and the like are to be construed in an inclusive as opposed to an exclusive or exhaustive sense; that is to say, in the  
30 sense of "including, but not limited to".

## CLAIMS

1. A method of allocating a sequence identifier to a sequence of messages relating to substantially the same subject matter and which are to be transmit onto  
5 one or more communications channels, the method comprising:  
generating a meaningless sequence identifier part;  
combining the generated meaningless identifier part with a meaningful  
sequence identifier part to provide the sequence identifier; and  
allocating the sequence identifier to the sequence of messages;  
10 wherein the meaningless sequence identifier part is generated such that when  
combined with the meaningful sequence identifier part the resulting sequence  
identifier is unique at least at that time.
2. A method according to claim 1, wherein the meaningful part of the sequence  
15 identifier is a network address or other network locator.
3. A method according to claim 2, wherein the meaningful part of the sequence  
identifier is a Universal Resource Locator (URL).
- 20 4. A method according to claim 2, wherein the meaningful part of the sequence  
identifier is an email address.
5. A method according to claim 2, wherein the meaningful part of the sequence  
identifier is an Internet Protocol network address.
- 25 6. A method according to any of the preceding claims, wherein the  
meaningless part of the sequence identifier is a number.
7. A method according to claim 6, wherein the number is randomly generated.
- 30 8. A method according to claim 6, wherein the number is produced by applying  
a hash function to data defining the subject matter of the sequence of messages.

9. A method according to any of the preceding claims, and further comprising generating the meaningful part of the sequence identifier, if required.

10. A method according to any of the preceding claims, and further comprising  
5 checking if the generated meaningless part of the sequence identifier has been previously generated, and if so generating another meaningless sequence identifier part; wherein the checking and generating steps are repeated until a meaningless sequence identifier part is obtained which has not been previously generated.

10 11. A method according to any of the preceding claims, and further comprising the step of receiving a request for a sequence identifier, the allocating step then further comprising transmitting the subsequently obtained sequence identifier to the party or element from which the request was received.

15 12. An announcement method for use in a publish-subscribe architecture, the method comprising: transmitting a sequence of messages relating to substantially the same subject matter on to one or more communications channels, each message in the sequence including at least part of a sequence identifier, the method being characterised in that the sequence identifier is allocated to the sequence in  
20 accordance with any of the preceding claims.

13. An announcement method for use in a publish-subscribe architecture, the method comprising transmitting an index message onto an index channel, the index message containing one or more sequence identifiers respectively identifying one or  
25 more sequences of messages, each message in each sequence relating to substantially the same subject matter, the method being characterised in that the sequence identifiers are respectively allocated to the sequences of messages in accordance with any of claims 1 to 11.

30 14. A computer program or suite of computer programs arranged such that when executed on a computer system it or they cause the computer system to operate in accordance with the method of any of the preceding claims.

15. A computer readable storage medium storing the computer program or at least one of the suite of computer programs according to claim 14.

16. An apparatus for allocating a sequence identifier to a sequence of messages relating to substantially the same subject matter and which are to be transmit onto one or more communications channels, the apparatus comprising:

identifier part generation means for generating a meaningless sequence identifier part;

sequence identifier generation means arranged to combine the generated meaningless identifier part with a meaningful sequence identifier part to provide the sequence identifier; and

sequence identifier allocating means for allocating the sequence identifier to the sequence of messages;

wherein the meaningless sequence identifier part is generated such that when combined with the meaningful sequence identifier part the resulting sequence identifier is unique at least at that time.

17. An apparatus according to claim 16, wherein the meaningful part of the sequence identifier is a network address or other network locator.

20

18. An apparatus according to claim 17, wherein the meaningful part of the sequence identifier is a Universal Resource Locator (URL).

19. An apparatus according to claim 17, wherein the meaningful part of the sequence identifier is an email address.

25

20. An apparatus according to claim 17, wherein the meaningful part of the sequence identifier is an Internet Protocol network address.

30

21. An apparatus according to any of claims 16 to 20, wherein the meaningless part of the sequence identifier is a number.

22. An apparatus according to claim 21, wherein the number is randomly generated.

23. An apparatus according to claim 21, wherein the number is produced by  
5 applying a hash function to data defining the subject matter of the sequence of messages.

24. An apparatus according to any of the preceding claims, and further comprising means for generating the meaningful part of the sequence identifier, if  
10 required.

25. An apparatus according to any of the preceding claims, and further comprising checking means for checking if the generated meaningless part of the sequence identifier has been previously generated; the identifier part generation  
15 means being further operable to generate another meaningless sequence identifier part if the checking means indicates that the generated meaningless part of the sequence identifier has been previously generated; wherein the checking means and the identifier part generation means repeat their respective operations until a meaningless sequence identifier part is obtained which has not been previously  
20 generated.

26. An apparatus according to any of claims 16 to 25, and further comprising the step of means for receiving a request for a sequence identifier; and the sequence identifier allocating means further comprising means for transmitting the  
25 subsequently obtained sequence identifier to the party or element from which the request was received.

27. An announcement system for use in a publish-subscribe architecture, the system comprising: message transmission means for transmitting a sequence of  
30 messages relating to substantially the same subject matter on to one or more communications channels, said means being operable to include in each message at least part of a sequence identifier, the system being characterised in that the

sequence identifier having been allocated to the sequence by an apparatus according to any of claims 16 to 26.

28. An announcement system for use in a publish-subscribe architecture, the  
5 system comprising: message transmission means for transmitting an index message  
onto an index channel, the index message containing one or more sequence  
identifiers respectively identifying one or more sequences of messages, each  
message in each sequence relating to substantially the same subject matter, the  
system being characterised in that the sequence identifiers are respectively allocated  
10 to the sequences of messages by an apparatus according to any of claims 16 to 26.

29. An announcement system according to claims 27 or 28, and further  
comprising means for requesting the allocation of a sequence identifier from an  
apparatus according to any of claims 16 to 26.


## ABSTRACT

Announcement Thread Addressing

5 An announcement thread addressing format which comprises a meaningful part concatenated with a meaningless part is described. The meaningful part is preferably the address of the party which generates the addressing identifier, whereas the meaningless part may be random data. An allocator method and apparatus is provided which acts to generate such announcement thread identifiers (ATHIDs), and to allocate them to channels as appropriate.

10

Figure (1)



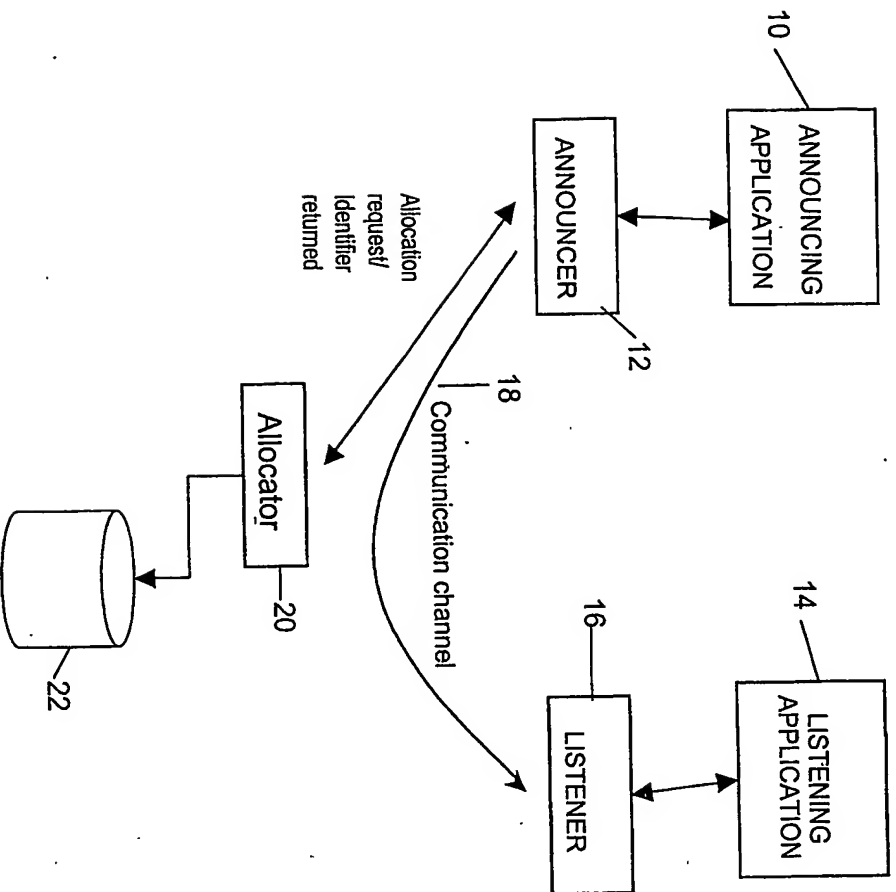


Figure 1

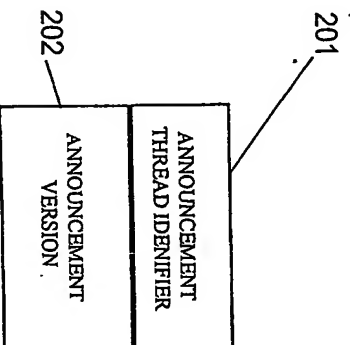


Figure 2



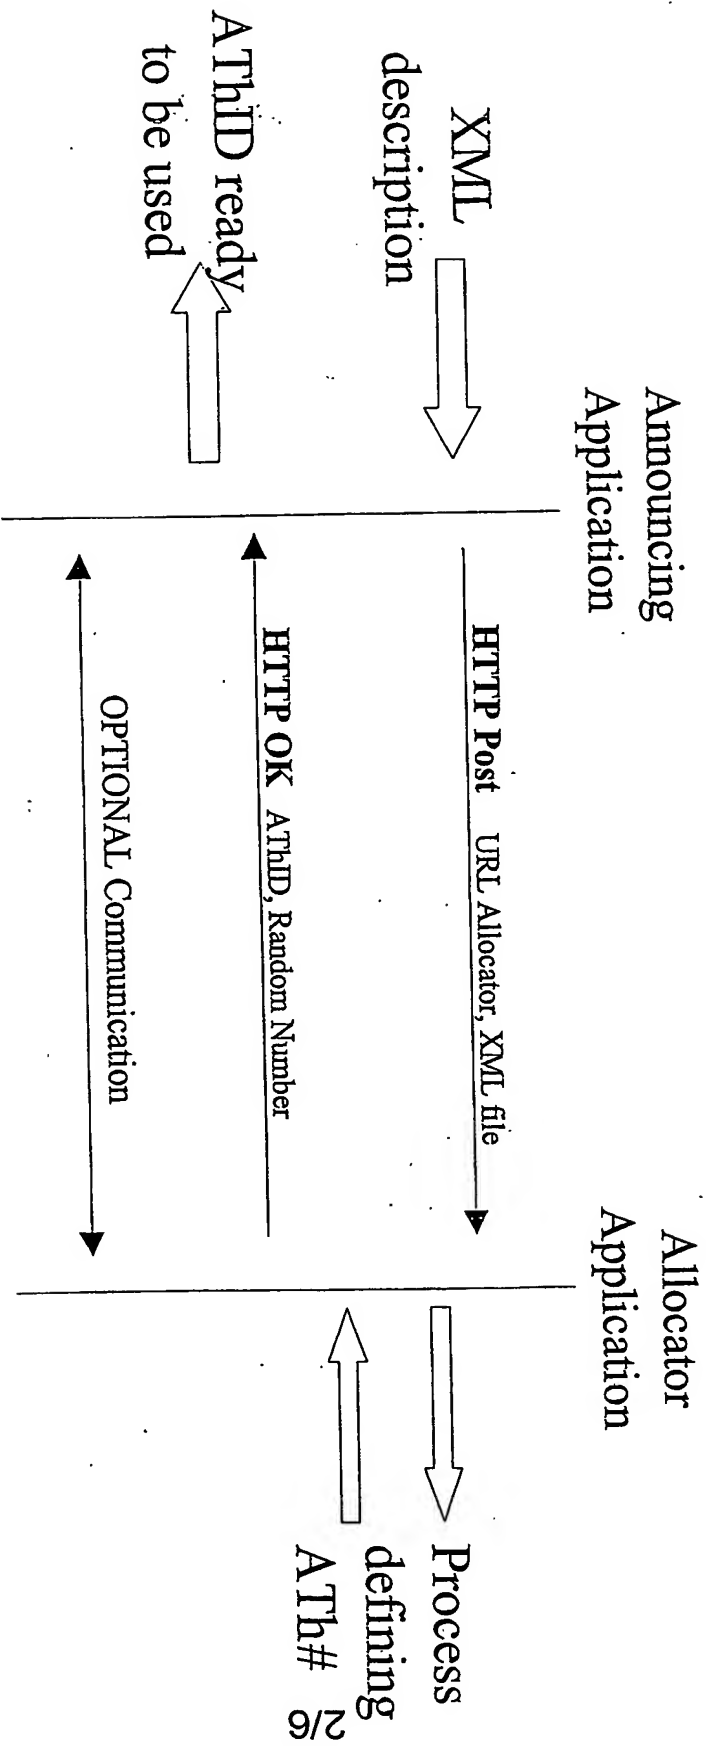


Figure 3


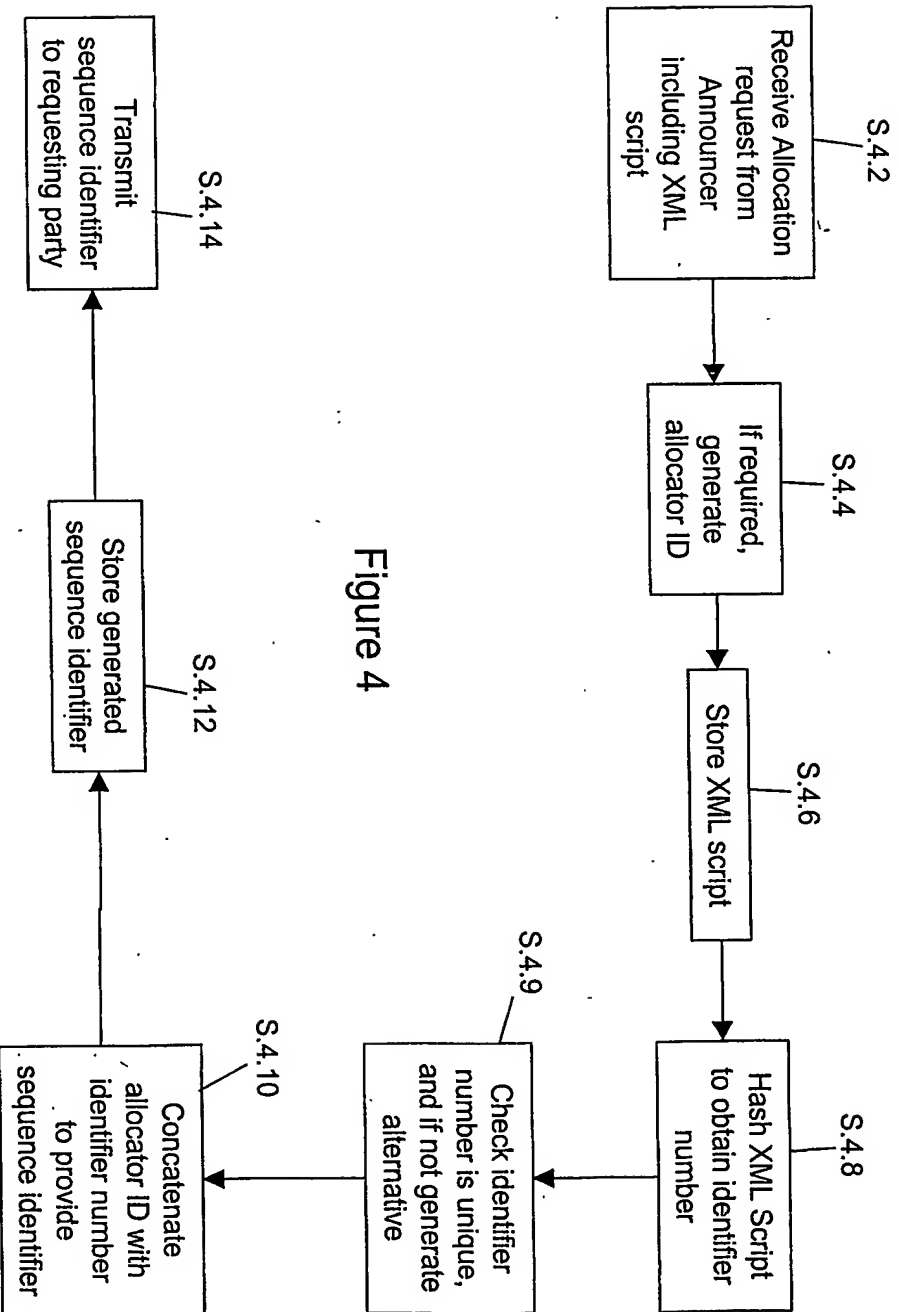


Figure 4





## Figure 6

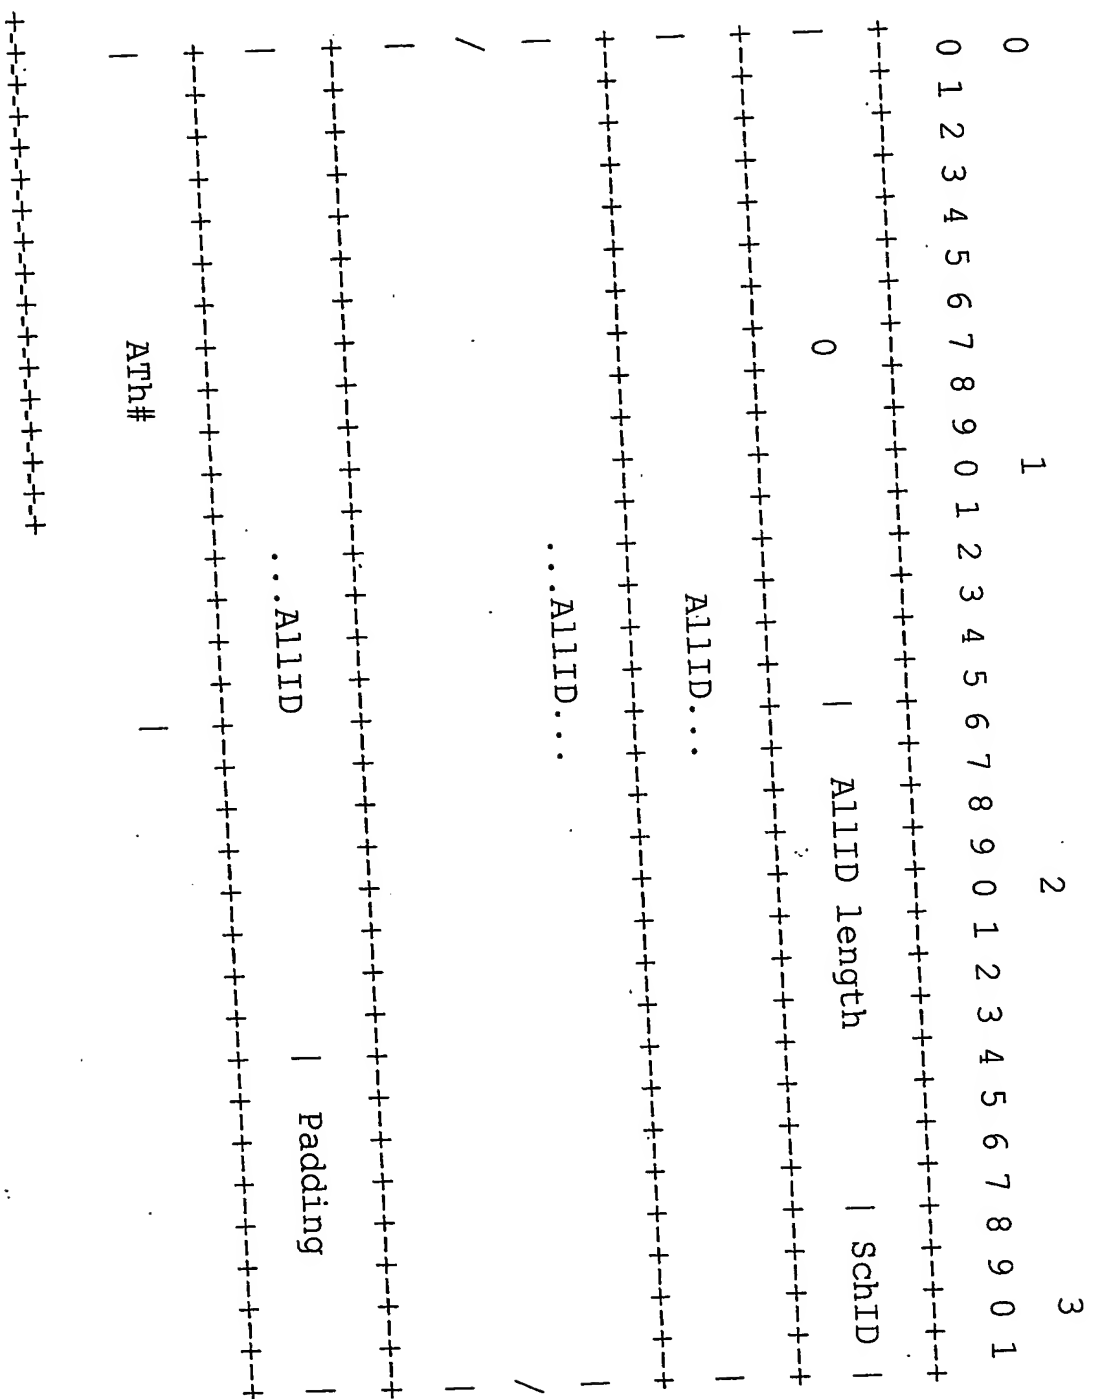

**PCT/GB2004/001243**



This Page is inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record

## BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☒ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLORED OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REPERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images  
problems checked, please do not report the  
problems to the IFW Image Problem Mailbox**